

AC 1410

Cummins
Mecc Alte
D+ &



ISO8528 GC ;) &

SZUTEST GC - \$\$\$

CE

2000/14/EC &\$\$\$#(#

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	1410,00	1128,00	1280,00	1024,00	1847,00

Standard Specifications

z

fl ! E

z

ALTERNATOR

fl " E

fl " E

fl " \$\$\$' \$\$\$' E

fl " \$\$\$' \$\$\$' E

TRANSFER SWITCH

AC 1410

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		KTA 50 G3		
		%\$\$' "# "		
		%&&+ "		
		0%* () < DQ		
	L	50,30		
	"	159 x 159		
		13,9:1		
	fl # ı	"# "	1500	
	fl ı	L	177,00	
		L	410,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	105,00		
	' # "	1620		
	' # "	240,00		
	° C	525		
		24 V d.c.		
	Load	%\$\$ı	'+)ı)\$ı
	# "			
		261,00	199,00	139,00


		Mecc Alte		
		ECO 43-2LN		
	Hz	50		
	"	1300		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	1876		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 1410	9900	4950	2100	2500	2000
		fl ı		fl ı	
	"	"	"	"	L
AK 98	14600	9000	2270	3200	1900

AC 1410

Cummins
Mecc Alte
D+' &'

1 D+' &'

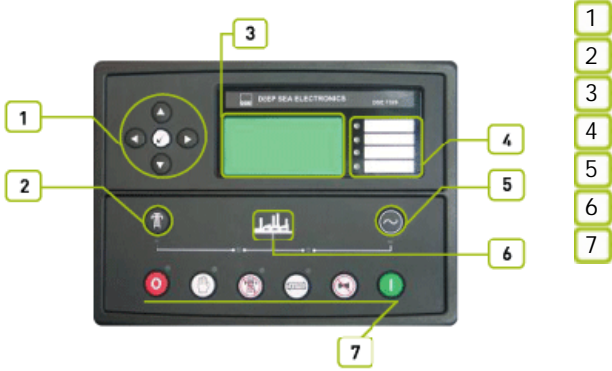

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž) \$' žž "8G9+' &\$ž 8G9+' &\$ž ž " % &1 * (" žFG&' &žFG(,) ž " ž

AC 1410

Cummins
Mecc Alte
D+ &

f@#@Bt
f@#@@t

"Z" "Z"

f@#@Bt

971

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$\$!*!&

6G'9B'*\$\$\$\$!*!(

f&)% +t

f&)(, t

f&)% \$t

"% , !&*\$"

&(\$)

'GA 8'

!&('

ž

AC 1410

Cummins
Mecc Alte
D+ &''

5? -, !'



- 1
- 2
- 3
- 4
- 5
- 6
- 7

1

fl \$\$\$! '%&\$ \$ E

ž ž " "

1

ž ž ž ž ž

&\$\$\$#/# "

	"	2270
fl "ž	"	9000
fl "ž	"	3200
		1900