

# AC 250

Cummins  
Mecc Alte  
D+ &



<b>ISO8528</b>	GC, ) &
<b>SZUTEST</b>	GC - \$\$\$
<b>CE</b>	

2000/14/EC & \$\$\$#( #  
z) \$ z'z' D:

	"	"	"	"	Amp
400/230	250,00	200,00	225,00	180,00	324,00

fP GDE GC, ) &  
) & z fDF DE % \$! % % & GC " \$ (\* z & GC

**Standard Specifications**

z  
fl ! E  
z  
z

**ALTERNATOR**

fl E  
fl " E  
fP \$\$\$ \$\$\$ E  
fl " \$ E

**TRANSFER SWITCH**

!

# AC 250

Cummins  
Mecc Alte  
D+' &'

Manufacturer		Cummins		
Model		6CTAA 8,3-G2		
		%\$\$' "# "		
		&' %\$\$' "		
		0%\$\$< DQ		
	L	8,300		
	"	114 x 135		
		16,7:1		
	fl # ı	"# "	1500	
	fl ı	L	23,80	
		L	32,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	15,30		
	' # "	186,00		
	' # "	41,00		
	° C	565,00		
		24 V d.c.		
	Load	%\$\$ı	'+)ı	)\$ı
	# "	51,80	38,00	25,00

		Mecc Alte		
		ECO 38-3SN		
	Hz	50		
	"	225,00		
7 cg'		0,80		
		3		
	fl ı	400/230		
	A	324,00		
Temperatur		H		


		fl ı		fl ı	
	"	"	"	"	L
AC 250	1940,00	2600,00	1150,00	1750,00	390,00
		fl ı		fl ı	
	"	"	"	"	L
AK 60	2600,00	3800	1210	2000	500





# AC 250

Cummins  
Mecc Alte  
D+ & "

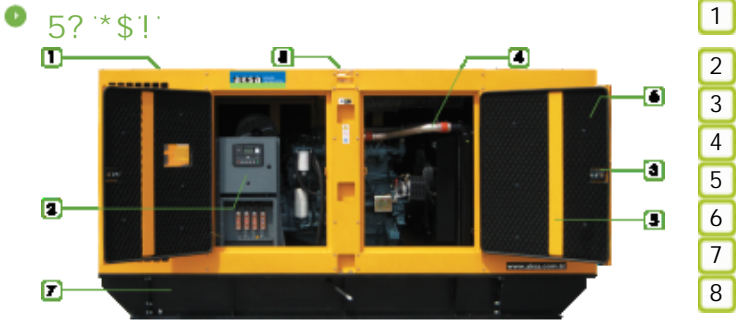

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8